


GUIDE AIR CYLINDER



Rod Stopper the next load, bending load, load smallest deviation, non-rotating accuracy of the position accuracy and cylinder seal performance to further improve.

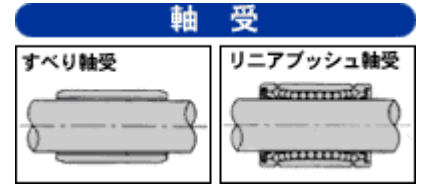


Bush sliding bearing linear bearing two types of bearing applications to match the available real estate.




STOPPER

The big load, and the shape of a different work (product carrier) position stopping the work of a number of storage and supports robust type.

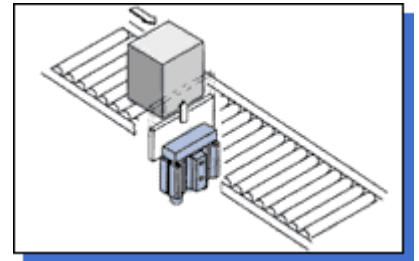

LIFT TYPE

Strong, thick guide Centre Rod of the ability to fully load ourselves, and Convair on direct conversion, positioning, as well endure lift design.

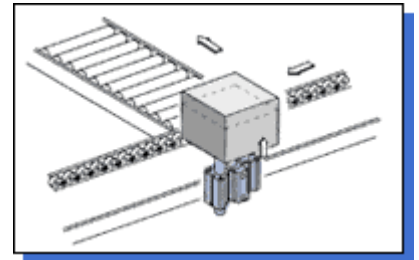

PUSHER TYPE

extrusion of the service, such as alignment Rod stopper. Guide is part of Bush 2 each arrangement, the rod guide designed to lessen the seasoning.

