

B 954 S/Ronly B 954 S c 

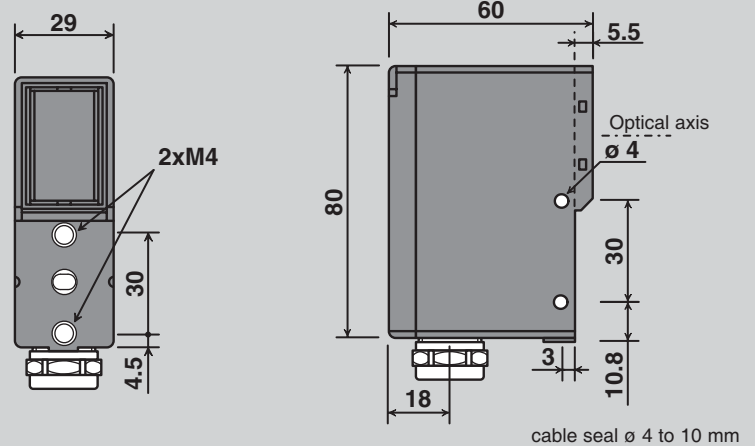
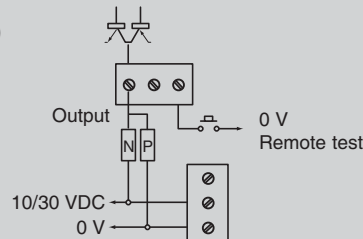

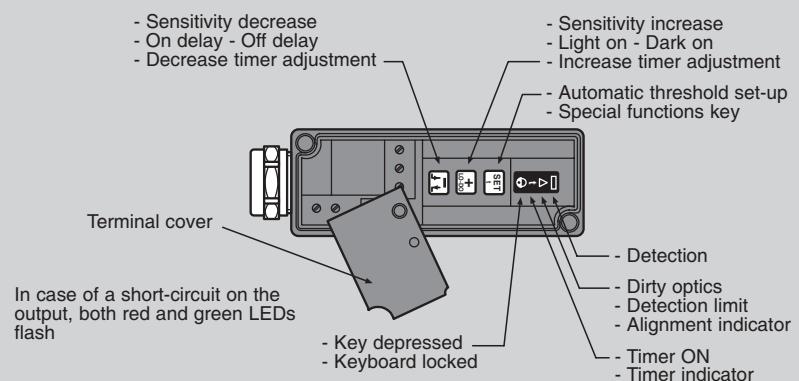
- Sensing distance on reflector \varnothing 84 : 6 m
- Supply : 10 to 30 VDC or 20 to 250 V AC/DC
- Output : PNP / NPN or relay
- Teach-in
- Double time-delay of output signal

**Description :**

- Simple and quick set-up for self-teach (standard and sensitive mode)
- Possible adjustment by key + / -
- Double adjustable timer
- Alignment indicator
- Dirty optics indicator
- Keyboard lock
- Remote test input (S type) simulate the beam cut-off
- Direct or inverse output
- Output : static or relay
- Connection on screw terminal
- Polycarbonate strong housing

Applications :

- Parcels jam control.
- Detection of shiny parts on material handling.
- Admittance control.

Dimensions**Wiring Connections**STATIC (S)RELAY (R)Terminal 250 V - 1,5 mm²**Visualisation and Adjustment**

Technical Information		B 954 S	B 954 R
Supply	voltage	10 / 30 VDC ripple < 10% within specified limits	20 / 250 V AC/DC
	consumption	50 mA	2 VA
Response time	t_{on} or t_{off}	500 μ s	20 ms
	switching frequency	1 KHz	25 Hz
Output	max. nominal intensity	100 mA	change over type relay U nominal : 250 V AC permanent max. I : 3 A
	residual voltage at 100 mA	< 2 V	
	residual voltage at 10 mA	< 1 V	
Emission	LED	red	
	modulation frequency	8 KHz	400 Hz
Timer	type	retriggerable - ON-delay / OFF-delay	
	range - increment duration	0 to 11s in 23 steps of 50 ms, then 0.5 s steps	
Temperature	operating	0 to 60° C	
	storage	-20 to 80° C	
External light immunity	incandescent light	10 000 lux 5° from optical axis	
	sunlight	20 000 lux 5° from optical axis	
Protections	supply	inverse polarity protection	—
	output	short-circuit or over-load	—
	degree of protection	IP 65 and IP 67	
Remote input	on	voltage < 1,4 V	—
	off	voltage > 3 V	—

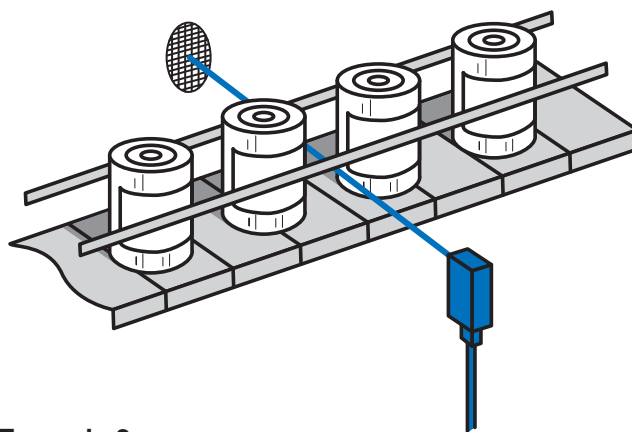
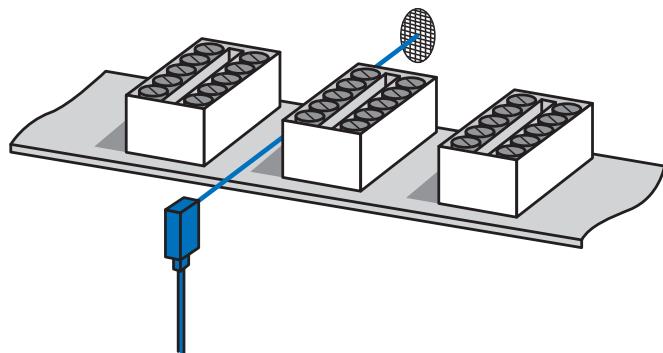
To Place Order

Product	Retro-reflex polarised sensor
Reference	B 954 S : static - 10 / 30 VDC B 954 R : relay - 20 / 250 V AC/DC

TYPES OF APPLICATIONS

Example 1

Retro-reflex detection.



Example 2

Detection of metallic shiny parts.