

- **Zero Voltage and Random Turn-On Switching**
- **Panel Mount**
- **Status Indicating LED**
- **DC or AC Control**
- **Integrated Overvoltage Protection by Automatic Self Turn-On (Suffix P)**

Featuring state-of-the-art Surface Mount Technology, these SPST-NO relays deliver proven reliability in the most demanding applications. Output consists of an SCR AC switch and is available in zero-cross or random turn-on versions. Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

MODEL NUMBERS	CMD2425 CMA2425	CMD2450 CMA2450	CMD2475 CMA2475	CMD2490 CMA2490	CMD24110 CMA24110	CMD24125 CMA24125
<b>OUTPUT SPECIFICATIONS</b> ①						
Operating Voltage (47-63 Hz) [Vrms]	24-280	24-280	24-280	24-280	24-280	24-280
Max. Load Current <sup>③</sup> [Arms]	25	50	75	90	110	125
Min. Load Current, [Arms]	0.15	0.15	0.25	0.25	0.25	0.25
Transient Overvoltage [Vpk]	600	600	600	600	600	600
Max. Surge Current, (16.6ms) [Apk]	250	625	1000	1200	1500	1750
Max. On-State Voltage Drop @ Rated Current [Vpk]	1.6	1.6	1.6	1.6	1.6	1.6
Thermal Resistance Junction to Case (R <sub>θJC</sub> ) [°C/W]	1.02	0.63	0.31	0.28	0.25	0.22
Maximum I <sup>2</sup> t for Fusing, (8.3 msec.) [A <sup>2</sup> sec]	260	1620	4150	6000	9340	12700
Max. Off-State Leakage Current @ Rated Voltage [mArms]	10	10	10	10	10	10
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec] ②	500	500	500	500	500	500
Max. Turn-On Time ④	1/2 Cycle (DC Control), 10.0 msec (AC Control)					
Max. Turn-Off Time	1/2 Cycle (DC Control), 40.0 msec(AC Control)					
Power Factor (Min.) with Max. Load	0.5	0.5	0.5	0.5	0.5	0.5

INPUT SPECIFICATIONS ①	DC CONTROL	AC CONTROL
	Control Voltage Range	3-32 Vdc
Max. Reverse Voltage	32 Vdc	—
Max. Turn-On Voltage	3.0 Vdc	90 Vrms
Min. Turn-Off Voltage	1.0 Vdc	10 Vrms
Max. Input Current	30.0mA ⑤	—
Typical Input Current	17mA @ 5 Vdc	15mA @ 120 Vrms

### GENERAL SPECIFICATIONS

Dielectric Strength 50/60Hz Input/Output/Base	4000 Vrms
Insulation Resistance (Min.) @ 500 Vdc	10 <sup>9</sup> Ohm
Max. Capacitance Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125°C
Status Indicating Display	Green LED

### MECHANICAL SPECIFICATIONS

Weight: (typical)	3.0 oz. (86.5g)
Encapsulation:	Thermally Conductive Epoxy
Terminals:	Cage Type
Maximum Wire Size- Output: AWG 8 (3.8mm) Input: AWG12 (2.5mm)	
Recommended Terminal Screw Torque Range:	
	Output: 10-15 in lb (1.1-1.7 Nm)
	Input: 5-6 in lb (0.6-0.7 Nm)


© 2005 CRYDOM CORP, Specifications subject to change without notice.

### GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ HEAT SINKING REQUIRED, for derating curves see page 2.
- ④ Turn-on time for DC control random turn-on versions is 0.02msec.
- ⑤ Input circuitry incorporates active current limiter.

For recommended applications and more information contact:  
**USA: Sales Support** (877) 502-5500 **Tech Support** (877) 702-7700 **FAX** (619) 710-8540  
 Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154  
**Email:** sales@crydom.com **WEB SITE:** http://www.crydom.com  
**UK:** +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 Cobham Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com.  
**GERMANY:** +49 (0)180 3000 506



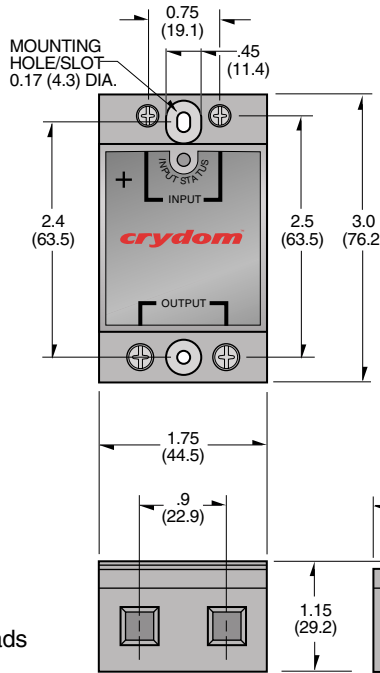

## MECHANICAL SPECIFICATIONS


All dimensions are in inches (millimeters)

**CMRD24/CMRA24** available with factory mounted heat sink and DIN rail mounting clip. Specifications available via FastFax, request document No. 171.

## AVAILABLE OPTIONS

- 10** Random Turn-On, Phase Controllable  
Example: **CMD2450-10**
- E** 24 Vac Input (18-36 Vac)  
Example: **CMA2450E**
- P** Internal Overvoltage Protection  
Relay Will Self Trigger Between 450-600 Vpk. Not Suitable For Capacitive Loads  
Example: **CMD2450P**

## CURRENT DERATING CURVES

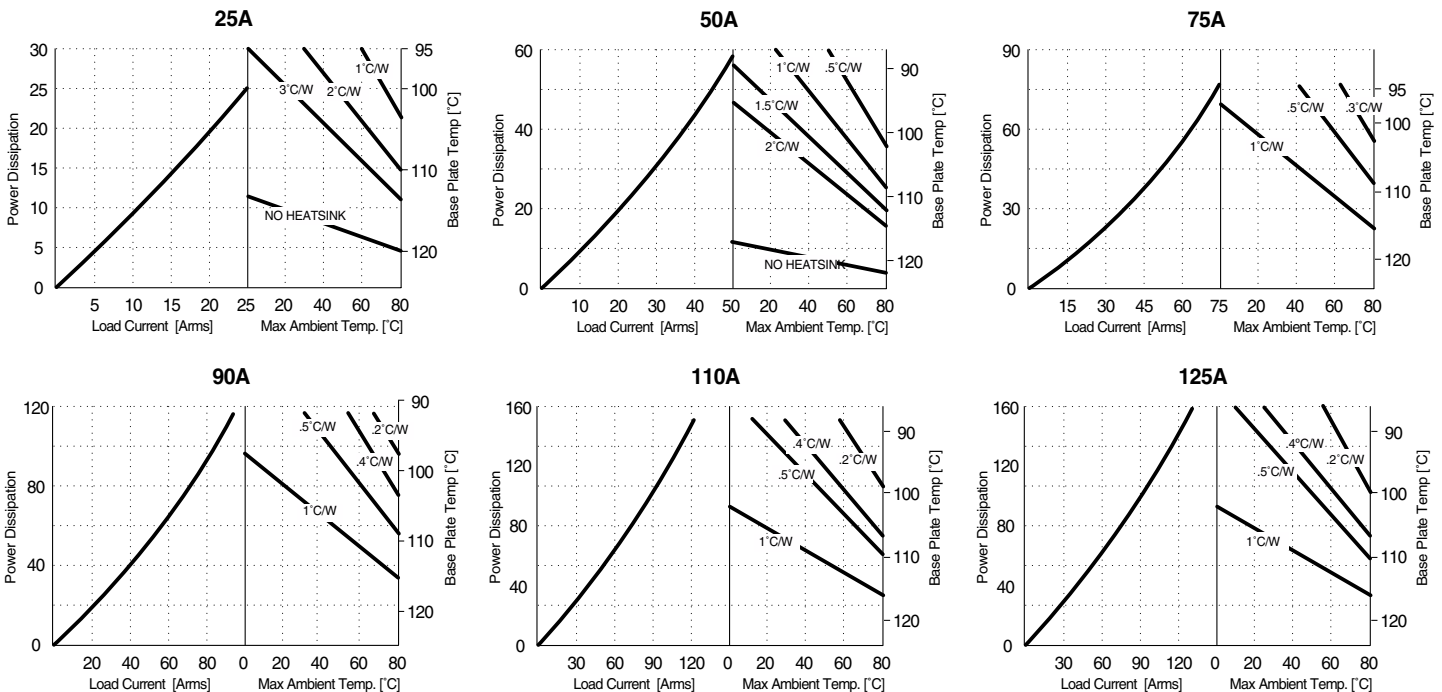

© 2005 CRYDOM CORP, Specifications subject to change without notice.

## APPROVALS

UL E116949, E116950  
CSA LR81689  
VDE 126921 UG (up to 90A models only)



For recommended applications and more information contact:

**USA: Sales Support** (877) 502-5500 **Tech Support** (877) 702-7700 **FAX** (619) 710-8540  
Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154

**Email:** sales@crydom.com **WEB SITE:** http://www.crydom.com

**UK:** +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 Cobham Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com.

**GERMANY:** +49 (0)180 3000 506



- **Zero Voltage and Random Turn-On Switching**
- **Panel Mount**
- **Status Indicating LED**
- **DC or AC Control**
- **Integrated Overvoltage Protection by Automatic Self Turn-On (Suffix P)**

Featuring state-of-the-art Surface Mount Technology, these SPST-NO relays deliver proven reliability in the most demanding applications. Output consists of an SCR AC switch and is available in zero-cross or random turn-on versions.

Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

MODEL NUMBERS	CMD4825 CMA4825	CMD4850 CMA4850	CMD4875 CMA4875	CMD4890 CMA4890	CMD48110 CMA48110	CMD48125 CMA48125
<b>OUTPUT SPECIFICATIONS ①</b>						
Operating Voltage (47-63 Hz) [Vrms]	48-530	48-530	48-530	48-530	48-530	48-530
Max. Load Current ③ [Arms]	25	50	75	90	110	125
Min. Load Current, [Arms]	0.15	0.15	0.25	0.25	0.25	0.25
Transient Overvoltage [Vpk]	1200	1200	1200	1200	1200	1200
Max. Surge Current, (16.6ms) [Apk]	250	625	1000	1200	1500	1750
Max. On-State Voltage Drop @ Rated Current [Vpk]	1.7	1.7	1.7	1.7	1.7	1.7
Thermal Resistance Junction to Case (R <sub>θJC</sub> ) [° C/W]	1.02	0.63	0.31	0.28	0.25	0.22
Maximum I <sup>2</sup> t for Fusing, (8.3 msec.) [A <sup>2</sup> sec]	260	1620	4150	6000	9340	12700
Max. Off-State Leakage Current @ Rated Voltage [mArms]	10	10	10	10	10	10
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec] ②	500	500	500	500	500	500
Max. Turn-On Time ④	1/2 Cycle (DC Control), 10.0 msec (AC Control)					
Max. Turn-Off Time	1/2 Cycle (DC Control), 40.0 msec (AC Control)					
Power Factor (Min.) with Max. Load	0.5	0.5	0.5	0.5	0.5	0.5

<b>INPUT SPECIFICATIONS ①</b>	<b>DC CONTROL</b>	<b>AC CONTROL</b>
Control Voltage Range	4-32 Vdc	90-140 Vrms
Max. Reverse Voltage	32 Vdc	—
Max. Turn-On Voltage	4.0 Vdc	90 Vrms
Min. Turn-Off Voltage	1.0 Vdc	10 Vrms
Max. Input Current	30.0mA ⑤	—
Typical Input Current	14mA @ 5 Vdc	15mA @ 120 Vrms

## GENERAL SPECIFICATIONS

Dielectric Strength 50/60Hz Input/Output/Base	4000 Vrms
Insulation Resistance (Min.) @ 500 Vdc	10 <sup>9</sup> Ohm
Max. Capacitance Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125°C
Status Indicating Display	Green LED

## MECHANICAL SPECIFICATIONS

Weight: (typical)	3.0 oz. (86.5g)
Encapsulation:	Thermally Conductive Epoxy
Terminals:	Cage Type
Maximum Wire Size- Output: AWG 8 (3.8mm) Input: AWG12 (2.5mm)	
Recommended Terminal Screw Torque Range:	Output: 10-15 in lb (1.1-1.7 Nm) Input: 5-6 in lb (0.6-0.7 Nm)


© 2005 CRYDOM CORP, Specifications subject to change without notice.

## GENERAL NOTES

- ① All parameters at 25° C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ HEAT SINKING REQUIRED, for derating curves see page 2.
- ④ Turn-on time for DC control random turn-on versions is 0.02msec.
- ⑤ Input circuitry incorporates active current limiter.

For recommended applications and more information contact:  
**USA: Sales Support (877) 502-5500 Tech Support (877) 702-7700 FAX (619) 710-8540**  
 Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154  
**Email:** sales@crydom.com **WEB SITE:** http://www.crydom.com  
**UK:** +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 Cobham Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com.  
**GERMANY:** +49 (0)180 3000 506



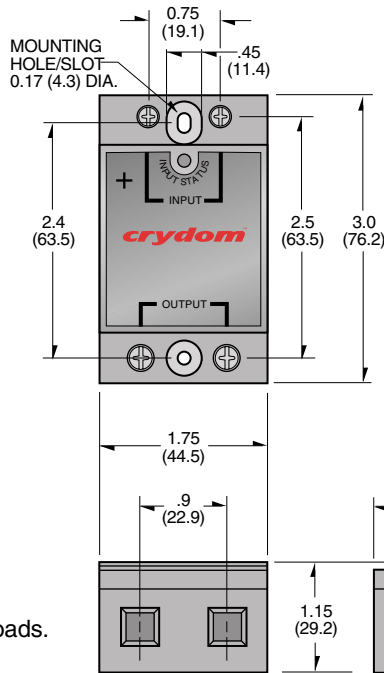

## MECHANICAL SPECIFICATIONS


All dimensions are in inches (millimeters)

**CMRD48/CMRA48** available with factory mounted heat sink and DIN rail mounting clip. Specifications available via FastFax, request document No. 171.

## AVAILABLE OPTIONS

- 10** Random Turn-On, Phase Controllable  
Example: **CMD4850-10**
- E** 24 Vac Input (18-36 Vac)  
Example: **CMA4850E**
- P** Internal Overvoltage Protection.  
Relay Will Self Trigger Between 900-1200Vpk. Not suitable For Capacitive Loads.  
Example: **CMD4850P**

## CURRENT DERATING CURVES

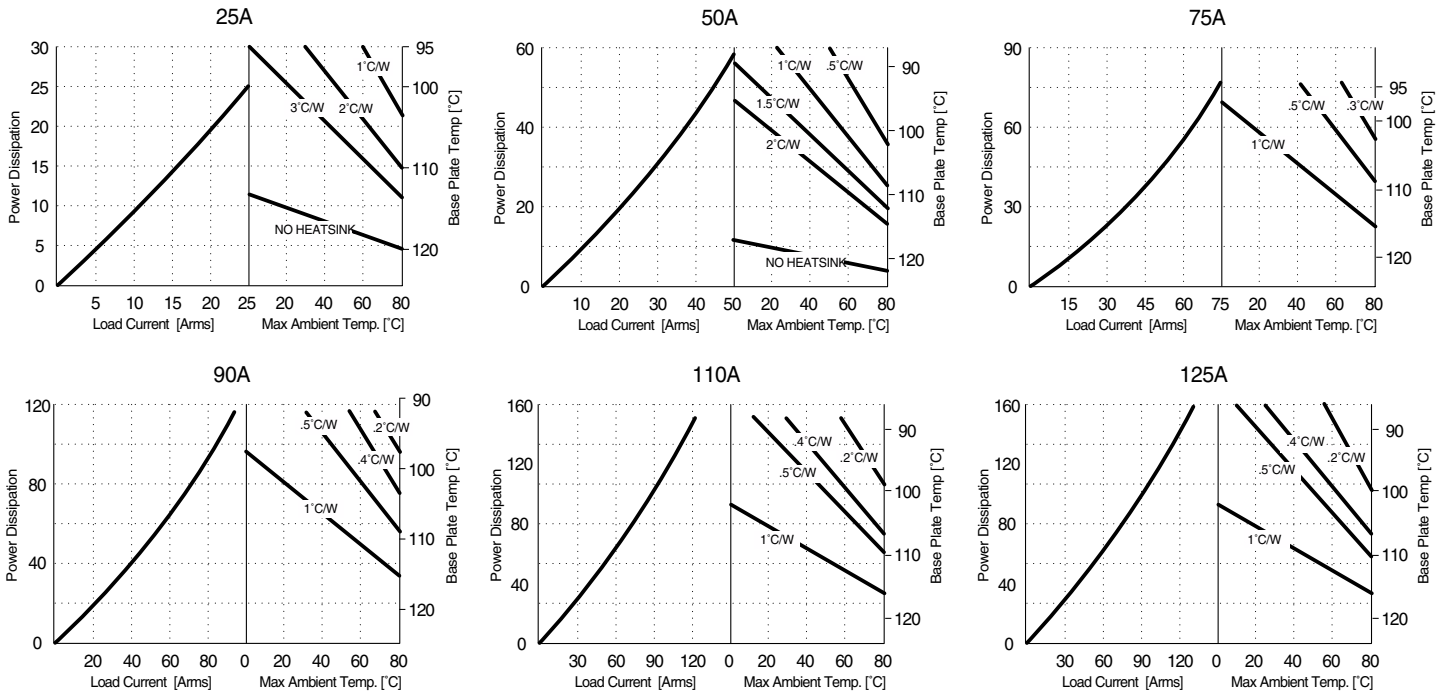

## APPROVALS

UL E116949, E116950  
CSA LR81689  
VDE 126921 UG (up to 90A models only)



© 2005 CRYDOM CORP, Specifications subject to change without notice.



- **Zero Voltage and Random Turn-On Switching**
- **Panel Mount**
- **Status Indicating LED**
- **DC or AC Control**
- **Integrated Overvoltage Protection by Automatic Self Turn-On (Suffix P)**

Featuring state-of-the-art Surface Mount Technology, these SPST-NO relays deliver proven reliability in the most demanding applications. Output consists of an SCR AC switch and is available in zero-cross or random turn-on versions.

Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

MODEL NUMBERS OUTPUT SPECIFICATIONS ①	CMD6025 CMA6025	CMD6050 CMA6050	CMD6075 CMA6075	CMD6090 CMA6090	CMD60110 CMA60110	CMD60125 CMA60125
Nominal Line Voltage ( ±10%) [Vrms]	600	600	600	600	600	600
Operating Voltage (47-63 Hz) [Vrms]	48-660	48-660	48-660	48-660	48-660	48-660
Max. Load Current ③ [Arms]	25	50	75	90	110	125
Min. Load Current, [Arms]	0.15	0.15	0.25	0.25	0.25	0.25
Transient Overvoltage [Vpk]	1200	1200	1200	1200	1200	1200
Max. Surge Current, (16.6ms) [Apk]	250	625	1000	1200	1500	1750
Max. On-State Voltage Drop @ Rated Current [Vpk]	1.7	1.7	1.7	1.7	1.7	1.7
Thermal Resistance Junction to Case (R <sub>θJC</sub> ) [°C/W]	1.02	0.63	0.31	0.28	0.25	0.22
Maximum I <sup>2</sup> t for Fusing, (8.3 msec.) [A <sup>2</sup> sec]	260	1620	4150	6000	9340	12700
Max. Off-State Leakage Current @ Rated Voltage [mArms]	1.0	1.0	1.0	1.0	1.0	1.0
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec] ②	500	500	500	500	500	500
Max. Turn-On Time ④	1/2 Cycle (DC Control), 10.0 msec (AC Control)					
Max. Turn-Off Time	1/2 Cycle (DC Control), 40.0 msec(AC Control)					
Power Factor (Min.) with Max. Load	0.5	0.5	0.5	0.5	0.5	0.5

INPUT SPECIFICATIONS ①	DC CONTROL	AC CONTROL
Control Voltage Range	4-32 Vdc	90-140 Vrms
Max. Reverse Voltage	32 Vdc	—
Max. Turn-On Voltage	4.0 Vdc	90 Vrms
Min. Turn-Off Voltage	1.0 Vdc	10 Vrms
Max. Input Current	30.0mA ⑤	—
Typical Input Current	14mA @ 5 Vdc	15mA @ 120 Vrms

### GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ HEAT SINKING REQUIRED, for derating curves see page 2.
- ④ Turn-on time for DC control random turn-on versions is 0.02msec.
- ⑤ Input circuitry incorporates active current limiter.


### GENERAL SPECIFICATIONS

Dielectric Strength 50/60Hz Input/Output/Base	4000 Vrms
Insulation Resistance (Min.) @ 500 Vdc	10 <sup>9</sup> Ohm
Max. Capacitance Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125°C
Status Indicating Display	Green LED

### MECHANICAL SPECIFICATIONS

Weight: (typical)	3.0 oz. (86.5g)
Encapsulation:	Thermally Conductive Epoxy
Terminals:	Cage Type
Maximum Wire Size- Output: AWG 8 (3.8mm) Input: Awg12 (2.5mm)	
Recommended Terminal Screw Torque Range:	
	Output: 10-15 in lb (1.1-1.7 Nm)
	Input: 5-6 in lb (0.6-0.7 Nm)

© 2005 CRYDOM CORP, Specifications subject to change without notice.

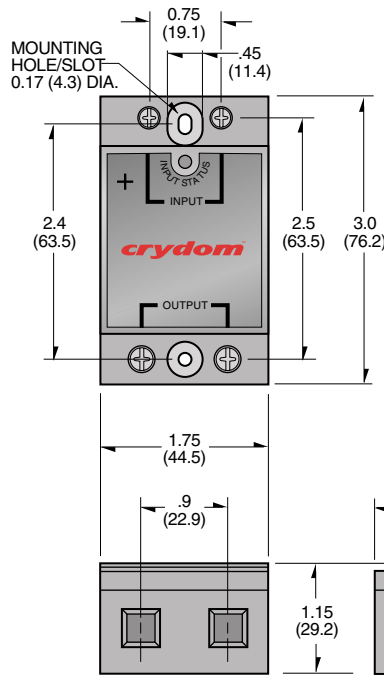

## MECHANICAL DIMENSIONS







All dimensions are in inches (millimeters)

**CMRD60/CMRA60** available with factory mounted heat sink and DIN rail mounting clip. Specifications available via FastFax, request document No. 171.

## AVAILABLE OPTIONS

- 10** Random Turn-On, Phase Controllable  
Example: **CMD6050-10**
- E** 24 Vac Input (18-36 Vac)  
Example: **CMA6050E**
- P** Internal Overvoltage Protection. Relay Will Self Trigger Between 900-1200Vpk. Not Suitable For Capacitive Loads.  
Example: **CMD6050P**

## CURRENT DERATING CURVES

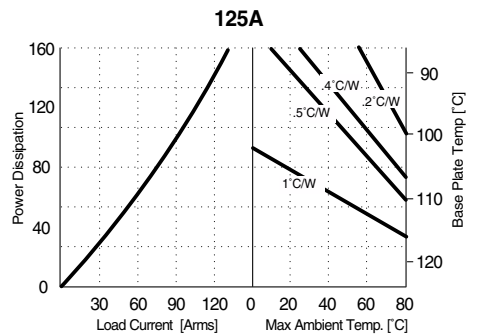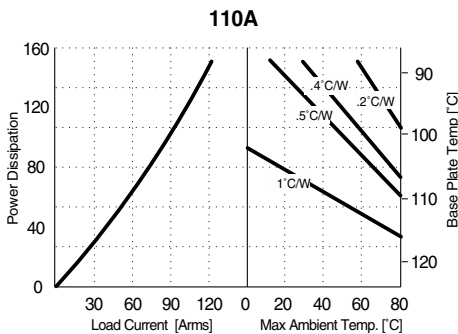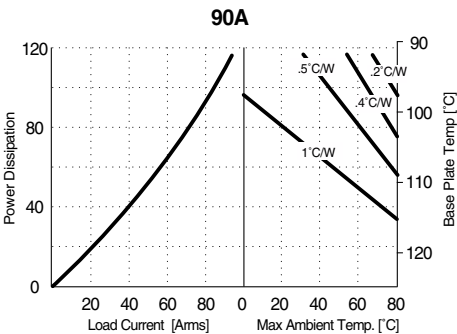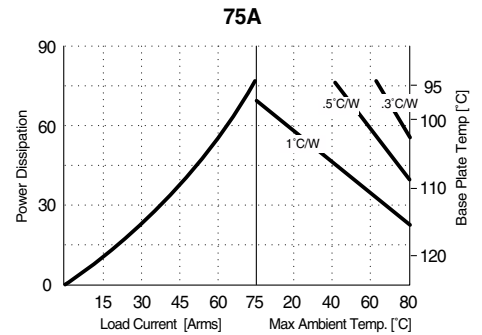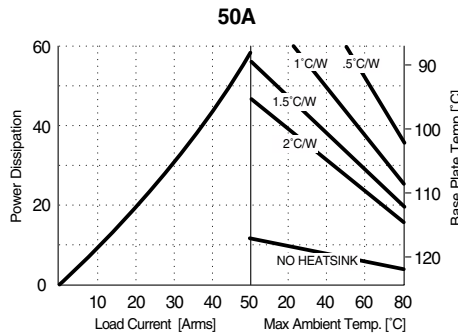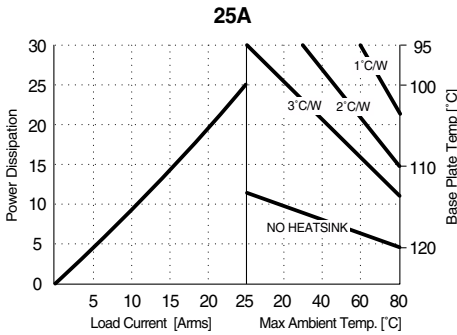

© 2005 CRYDOM CORP. Specifications subject to change without notice.

## APPROVALS

UL E116949, E116950  
 CSA LR81689  
 VDE 126921 UG (up to 90A models only)



SERIES CMD/CMA.  
 Rev. 010305  
 PAGE 6 OF 6

For recommended applications and more information contact:  
**USA: Sales Support** (877) 502-5500 **Tech Support** (877) 702-7700 **FAX** (619) 710-8540  
 Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154  
**Email:** sales@crydom.com **WEB SITE:** http://www.crydom.com  
**UK:** +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 Cobham Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com.  
**GERMANY:** +49 (0)180 3000 506



## ANNEX – ENVIRONMENTAL INFORMATION:

The environmental information disclosed in this annex including the EIP Pollution logo are in compliance with People's Republic of China Electronic Industry Standard SJ/T11364 – 2006, Marking for Control of Pollution Caused by Electronic Information Products.

Part Name	Toxic or hazardous Substance and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr (VI))	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
Semiconductor die	X	O	O	O	O	O
Solder	X	O	O	O	O	O

### 附件 - 环保信息:

此附件所标示的包括电子信息产品污染图标的环保信息符合中华人民共和国电子行业标准 **SJ/T11364 - 2006**, 电子信息产品污染控制标识要求

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr (VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
半导体芯片	X	O	O	O	O	O
焊接点	X	O	O	O	O	O

