

## Features:


- Equipped with an external guide device to prevent the piston rod from turning.
- Use unlubricated seals and bush for durable performance.
- End stop adjustment screws with PU bumper, optional shock absorbers.
- Tapped mounting holes in tool plate and guide block for easy mounting and toolings attachment.
- Suitable for vertical or horizontal configuration of motions.




## Specifications:

<b>Action</b>	Double acting with magnetic piston
<b>Series</b>	GC
<b>Bore</b>	ø20, ø25, ø32, ø40
<b>Operating fluid</b>	Compressed air
<b>Operating pressure</b>	0.7-9.9 kgf/cm <sup>2</sup>
<b>Proof pressure</b>	15 kgf/cm <sup>2</sup>
<b>Speed range</b>	50~500 mm/sec
<b>Temperature range</b>	-10°C~+70°C
<b>Cushion</b>	With adj, cushion at both ends
<b>Lubrication</b>	Not required

## How to Order:

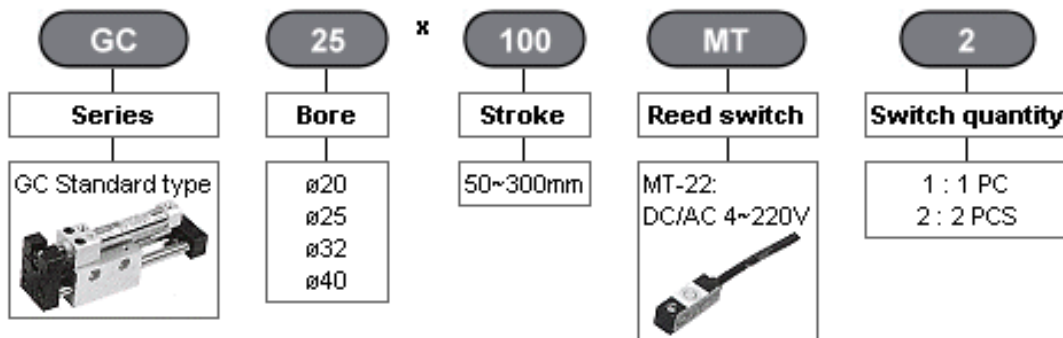

## External Dimensions:

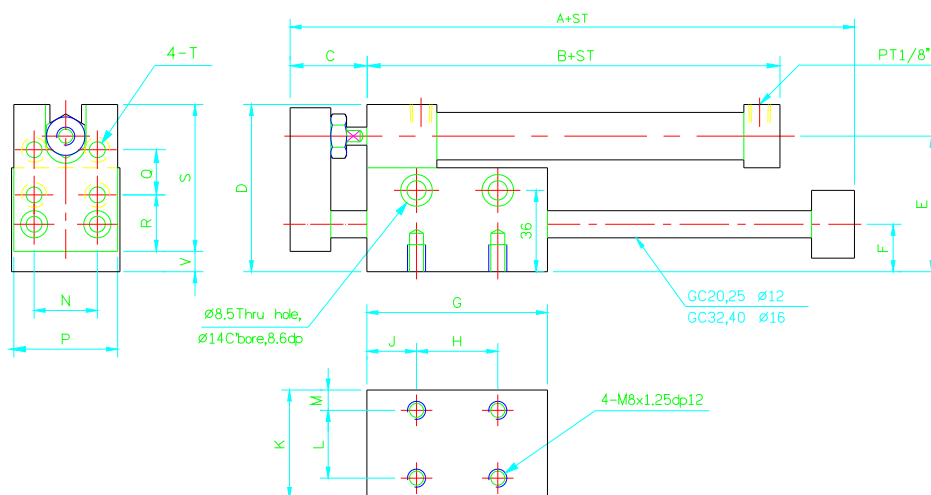

Bore (mm)	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	V	W
ø20	150	78	34	74	59	21	80	36	22	48	30	9	28	46	20	25	65	6.6	9	36
ø25	150	80	34	80	63	21	80	36	22	48	30	9	28	46	20	25	65	6.6	9	36
ø32	173	87	43	98	78	25	95	45	25	60	36	12	36	56	30	32	86	8.5	10	42
ø40	173	98	43	106	82	25	95	45	25	60	36	12	36	56	30	32	86	8.5	10	42