

- 1200 Volt Blocking
- Panel Mount
- Up to 660 Vac
- Zero Voltage and Random Turn-On
- SCR Output
- Integrated Overvoltage Protection by Automatic Self Turn-On (Suffix P)

High voltage relays use IC driven circuits for switching loads up to 660 VAC. All models come with 1200 Volts blocking and are available with either AC or DC input (coil) control. Types H12CA and H12CD are snubberless (reduced leakage current). Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

MODEL NUMBERS	DC CONTROL	H12CD4825	H12CD4850	H12CD4890
	AC CONTROL	H12CA4825	H12CA4850	H12CA4890
OUTPUT SPECIFICATIONS ①				
Operating Voltage (47-63 Hz) [Vrms]		48-660	48-660	48-660
Max. Load Current ③ [Arms]		25	50	90
Min. Load Current, [mArms]		150	150	150
Transient Overvoltage [Vpk]		1200	1200	1200
Max. Surge Current, (16.6ms) [Apk]		250	625	1200
Max. On-State Voltage Drop @ Rated Current [Vpk]		1.6	1.6	1.6
Thermal Resistance Junction to Case ($R_{\theta JC}$) [° C/W]		1.02	.63	.28
Maximum $I^2 t$ for Fusing, (8.3 msec.) [A ² sec]		260	1620	6000
Max. Off-State Leakage Current @ Rated Voltage [mArms]		1.0	1.0	1.0
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec] ②		500	500	500
Max. Turn-On Time ④		1/2 Cycle (DC Control), 10.0 msec (AC Control)		
Max. Turn-Off Time		1/2 Cycle (DC Control), 40.0 msec (AC Control)		
Power Factor (Min.) with Max. Load		0.5	0.5	0.5

INPUT SPECIFICATIONS ①

	DC CONTROL (H12CD PREFIX)	AC CONTROL (H12CA PREFIX)
Control Voltage Range	4-15 Vdc	90-140 Vrms
Max. Turn-On Voltage	4.0 Vdc	90 Vrms
Min. Turn-Off Voltage	1.0 Vdc	10.0 Vrms
Nominal Input Impedance	300 Ohms	8K Ohms
Typical Input Current	15 mA @ 5 Vdc	15 mA @ 120 Vrms

© 2007 CRYDOM Inc., Specifications subject to change without notice.

GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-443, paragraph 13.11.1
- ③ Heat sinking required, for derating curves see page 2.
- ④ Turn-on time for DC control random turn-on versions is 0.02 msec.

GENERAL SPECIFICATIONS

Dielectric Strength 50/60Hz Input/Output/Base	4000 Vrms
Insulation Resistance (Min.) @ 500 Vdc	10 ⁹ Ohm
Max. Capacitance Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125°C

MECHANICAL SPECIFICATIONS


Weight: (typical)	3.0 oz. (86.5g)
Encapsulation:	Thermally Conductive Epoxy
Terminals:	Screws and Saddle Clamps Furnished, Unmounted

Crydom Heat Sinks offer excellent thermal management and are perfectly matched to the load current ratings of Crydom panel mount relays. Request Crydom's Heat Sink specification sheet for all the details.

Available Options

- F** Faston Terminals.
(50 Amp Models Only)
Example: **H12CD4850F**
- G** Input Status LED.
Agencies Approval Pending
Example: **H12CD4850G**
Note: Control Voltage Range 5.5-15Vdc
for DC Control Models.
- P** Internal Overvoltage Protection.
Relay Will Self Trigger Between
900-1200Vpk. Not Suitable For
Capacitive Loads.
Agencies Approval Pending
Example: **H12CD4850P**
- 10** Random Turn-On.
Example: **H12CD4850-10**
- H** Heat Transfer Pad (Attached)
Example: **H12CD4850H**

Ordering System: Combination of the suffixes should be made in the following order:
FPG-10.
Example: **H12CD4850FPG-10**

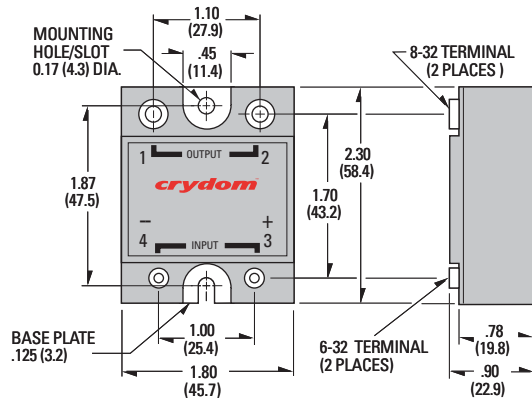


Screw Torque Requirements:

*6-32 Screws - 10 in. lbs.,
8-32 and 10-32 Screws - 20in. lbs.
(Screws dry without grease.)

Fastons:

Double pair* (50A model only).
Caution: User must connect to both pairs

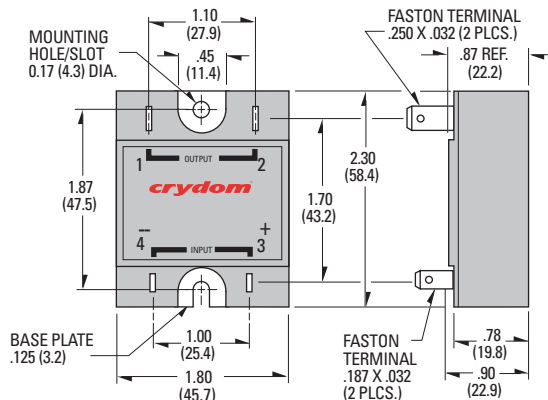

All dimensions are in inches (millimeters)

APPROVALS

UL E116949
CSA LR81689
VDE 10143 UG



For recommended applications and more information contact:

USA: Sales Support (877) 502-5500 **Tech Support** (877) 702-7700 FAX (619) 710-8540
Crydom Inc., 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154




Email: sales@crydom.com **WEB SITE:** http://www.crydom.com

UK: +44 (0)1202 606030 • **FAX** +44 (0)1202 606035 Crydom SSR Ltd., Arena Business Centre,
Holyrood Close, Poole, Dorset BH17 7FJ, Email: intsales@crydom.com.

GERMANY: +49 (0)180 3000 506



CURRENT DERATING CURVES

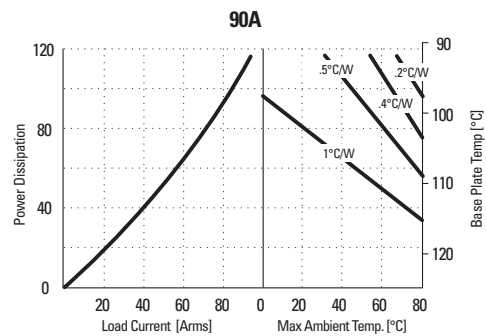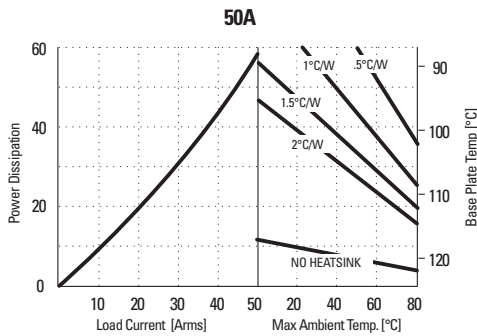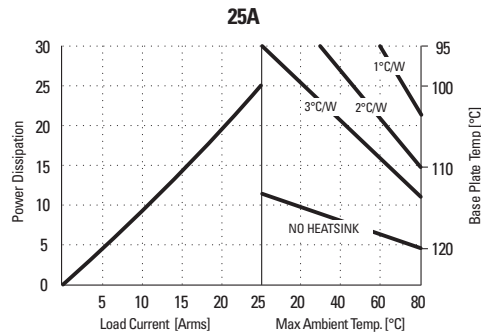

© 2007 CRYDOM Inc., Specifications subject to change without notice.

ANNEX – ENVIRONMENTAL INFORMATION:

The environmental information disclosed in this annex including the EIP Pollution logo are in compliance with People's Republic of China Electronic Industry Standard SJ/T11364 – 2006, Marking for Control of Pollution Caused by Electronic Information Products.

Part Name	Toxic or hazardous Substance and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr (VI))	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
Semiconductor die	X	O	O	O	O	O
Solder	X	O	O	O	O	O

附件 - 环保信息:

此附件所标示的包括电子信息产品污染图标的环保信息符合中华人民共和国电子行业标准 **SJ/T11364 - 2006**, 电子信息产品污染控制标识要求

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr (VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
半导体芯片	X	O	O	O	O	O
焊接点	X	O	O	O	O	O

