


## Specifications:


Type	Unit	MT-22	SH-22
		Reed switch	
Wiring system		Two wire type	
Load voltage	V	DC/AC 4~240	
Load current	mA	5~40	
Internal voltage drop.	V	2.5(Max)	
Temperature range	°C	-10~70	
Delay time	mS	ON+OFF<1	
Lead wire	M	2	
Protection degree		IP67	
Output		N.O.	
Indicator lamp		Red	Green



Wiring diagram

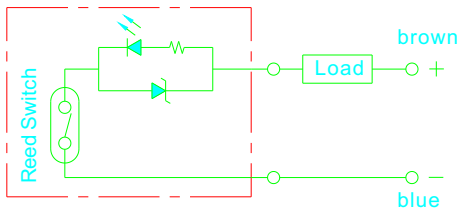

Additional external protection circuit

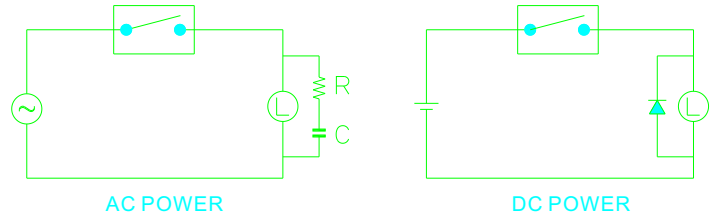

## External Dimensions:

### • MT-22

Cylinder series	Bore
AB	6~16
AC	20~40
MS	12~25
MB, GC, GD	16~40
GE	25,40

### • SH-22

Cylinder series	Bore
AL	32~125
AS	40~150

