

P-02A1

Unit: mm



P-02B



P-02D



P-02E1



P-02E2




P-02F




P-02H




R-02VC

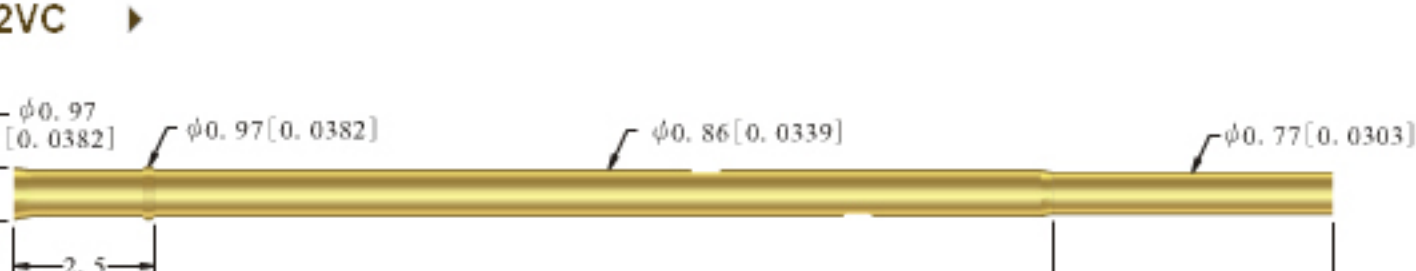


R-02V[W]

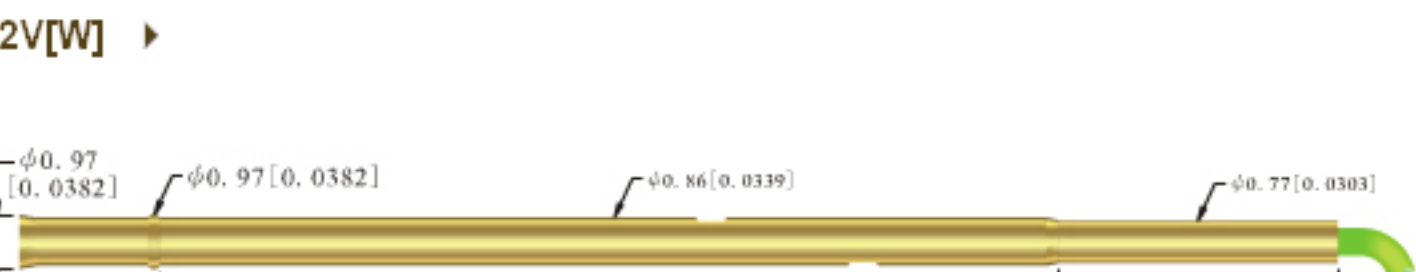

R-02WC

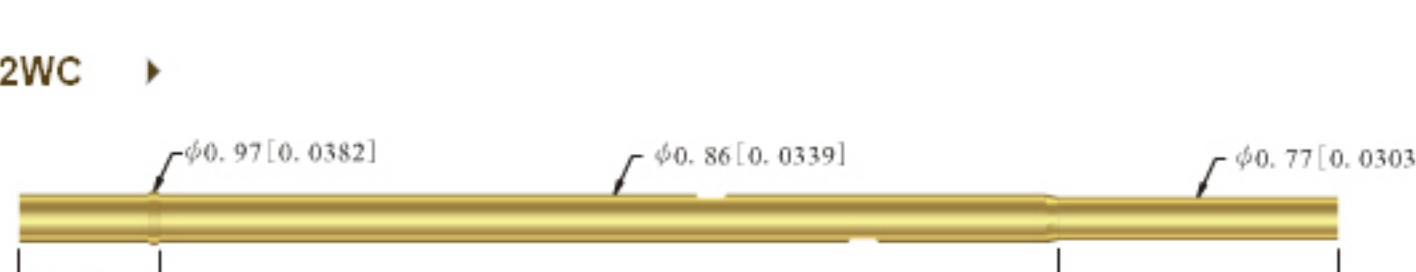

R-02W[W]

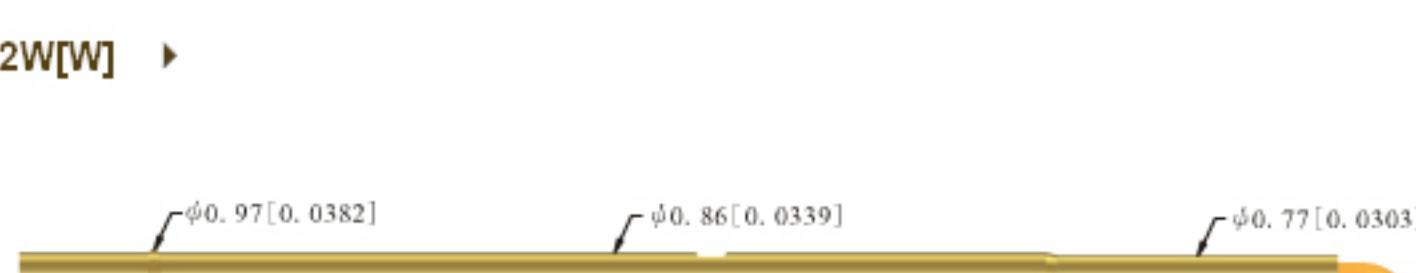

**Plunger:** Beryllium Copper or High Carbon Steel with Rhodium Plated

**Spring:** Stainless Steel

Receptacle with Terminal Wire

**Barrel:** Phosphor Bronze with Gold Plated

**Receptacle:** Phosphor Bronze with Gold Plated

<b>Min. Center:</b>	1.27 mm [0.05 inch]	<b>Current Rating:</b>	3 A
<b>Full Stroke:</b>	4.20 mm [0.1654 inch]	<b>Contact Resistance:</b>	30 mΩ
<b>Full Stroke Spring Force (±20%):</b>	150 g [5.29oz]	<b>Recommended Hole Size:</b>	0.95 mm [0.0374 inch]
<b>2/3 Stroke Spring Force (±20%):</b>	100 g [3.53oz]		