



P-058B


Unit: mm

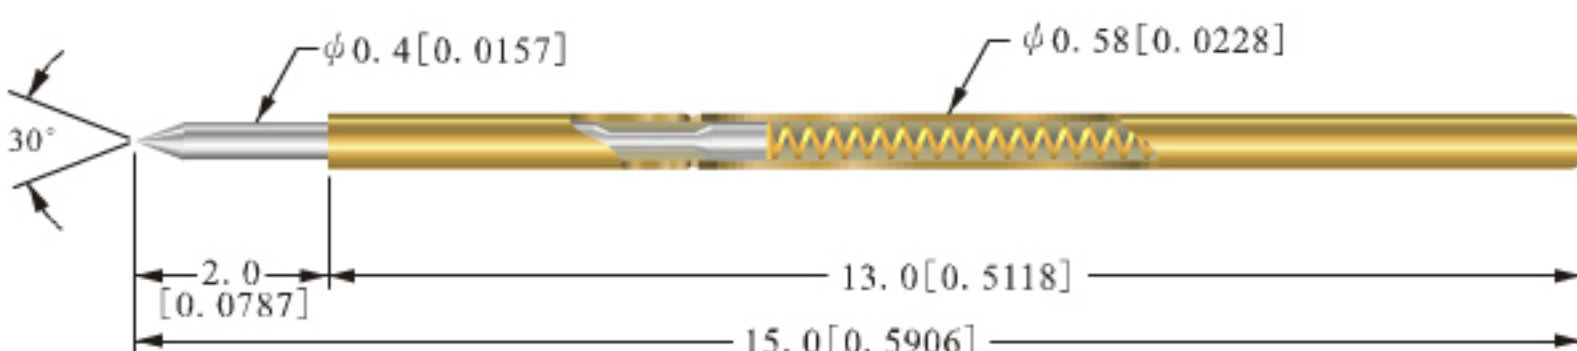


P-058D

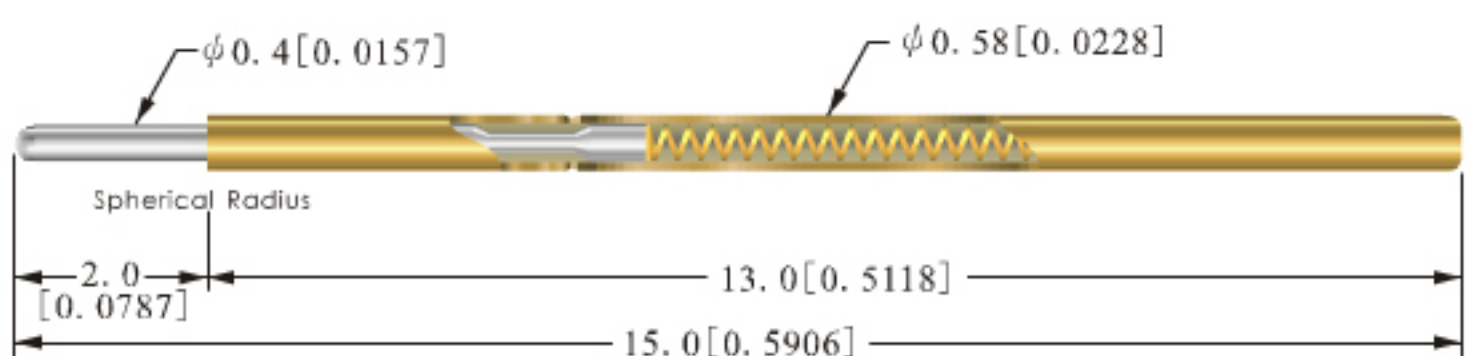


P-058E

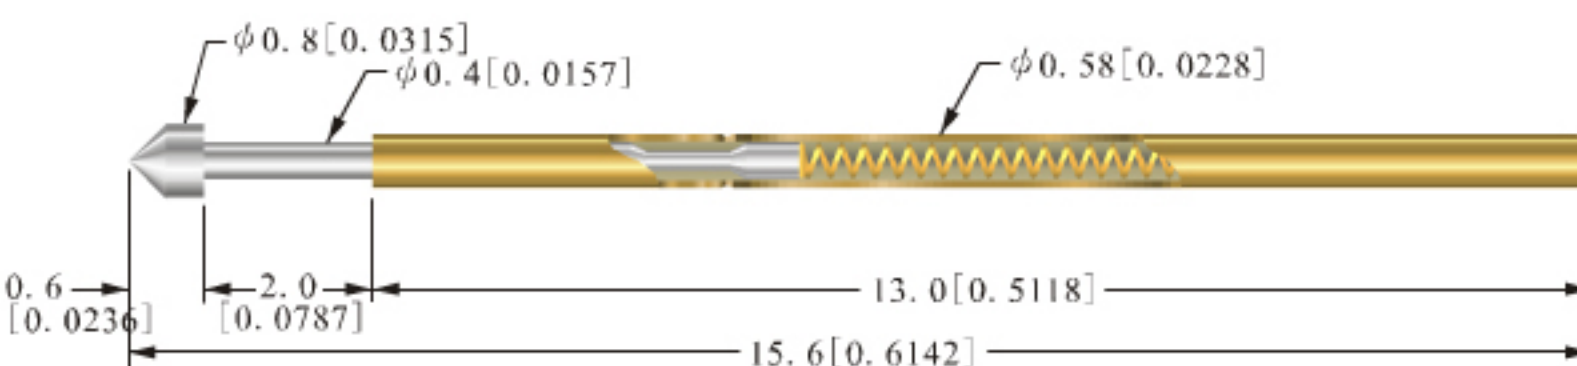


P-058F3

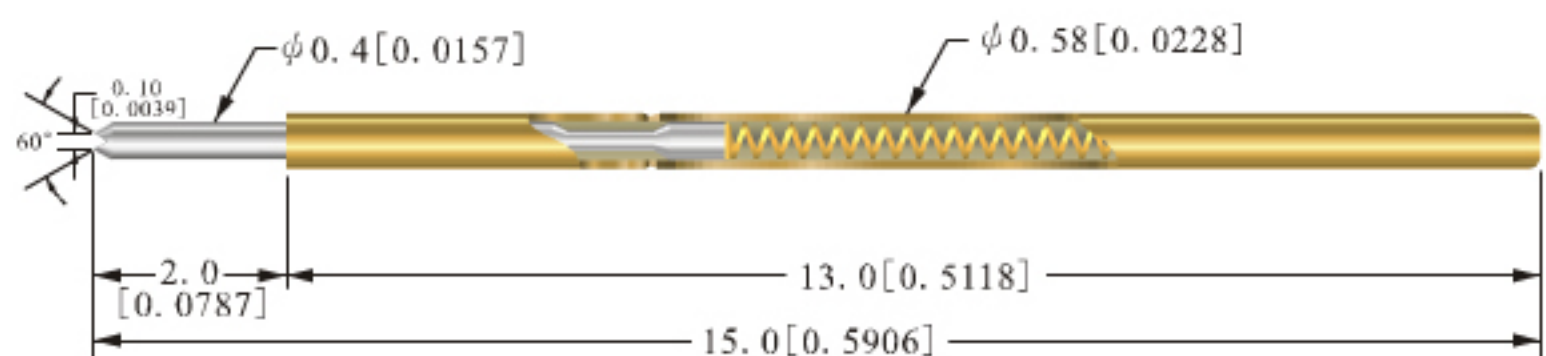

R-058VC

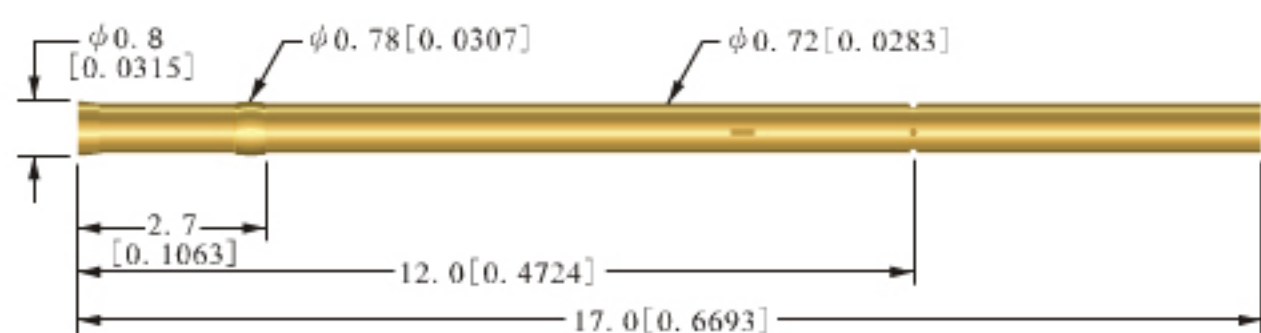

R-058V[W]

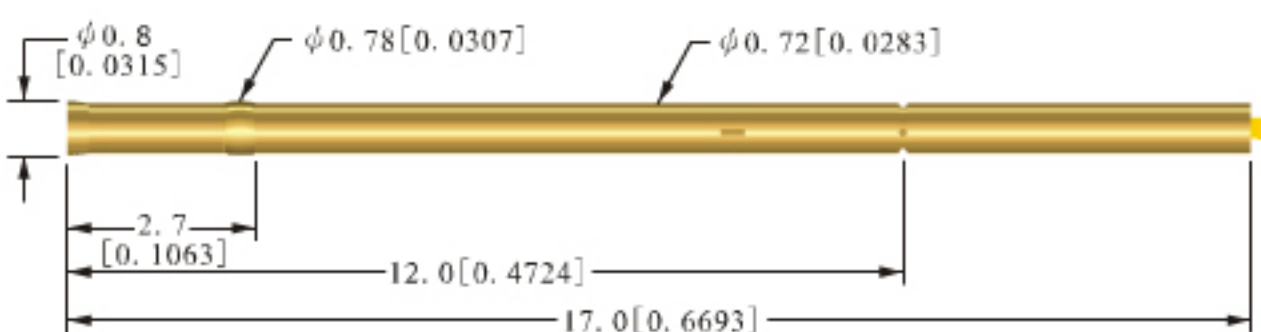

Plunger: High Carbon Steel with Rhodium Plated or Gold Plated

Spring: Music Wire with Gold Plated

Receptacle with Terminal Wire

Barrel: Phosphor Bronze with Gold Plated

Receptacle: Phosphor Bronze with Gold Plated

Min.Center:	1.0 mm [0.0394 inch]	Current Rating:	1A
Full Stroke:	2.0 mm [0.0787 inch]	Contact Resistance:	120 mΩ
Full Stroke Spring Force (±20%):	60 g [2.11oz]	Recommended Hole Size:	0.70 mm-0.76 mm [0.0275 inch]-[0.0299 inch]
2/3 Stroke Spring Force (±20%):	45 g [1.59oz]		