



P-111A


Unit: mm

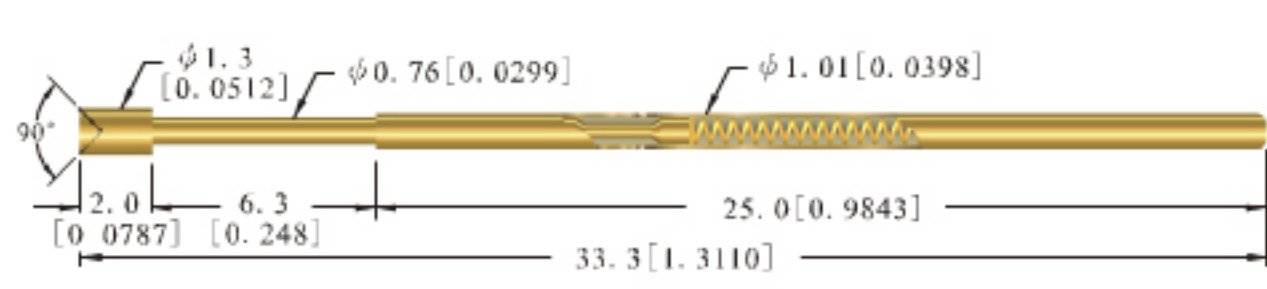

P-111B[SK4]

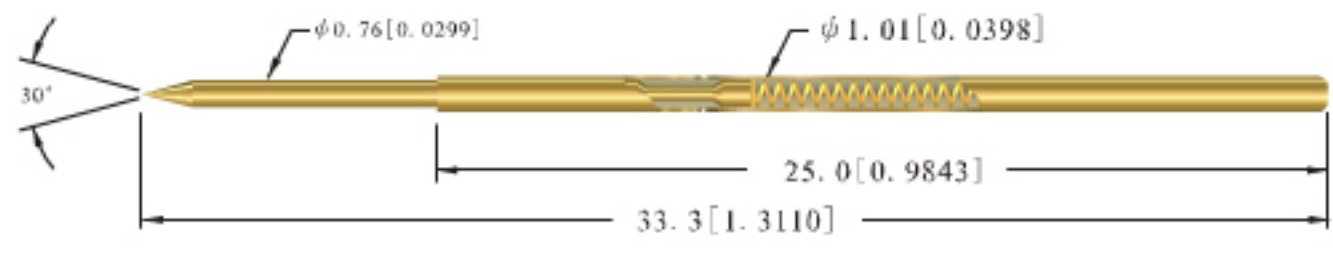


P-111F[SK4]

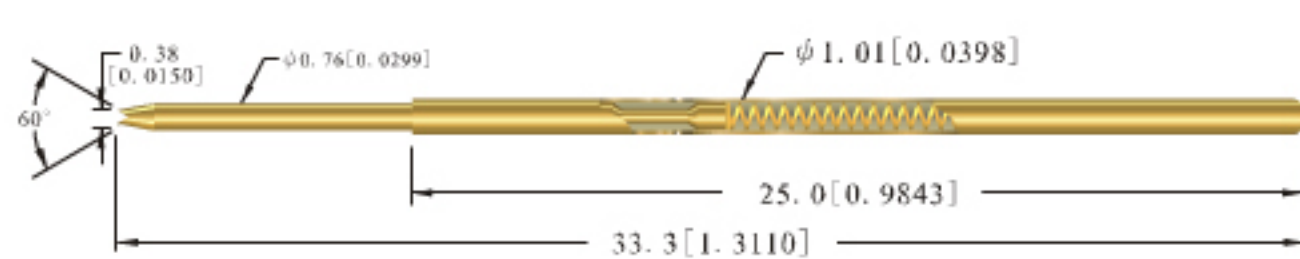

P-111F1[SK4]



P-111F2

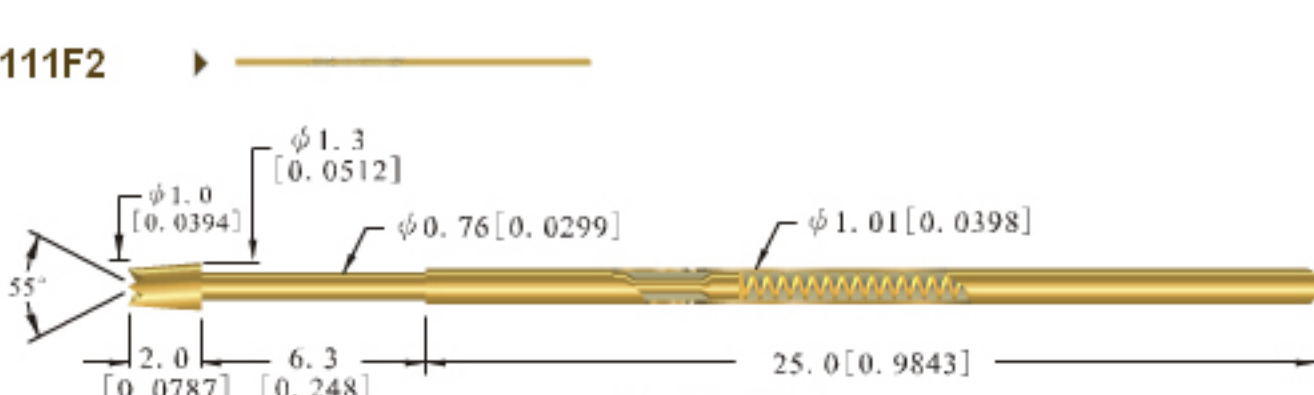


P-111H



P-111K




P-111M3[SK4]

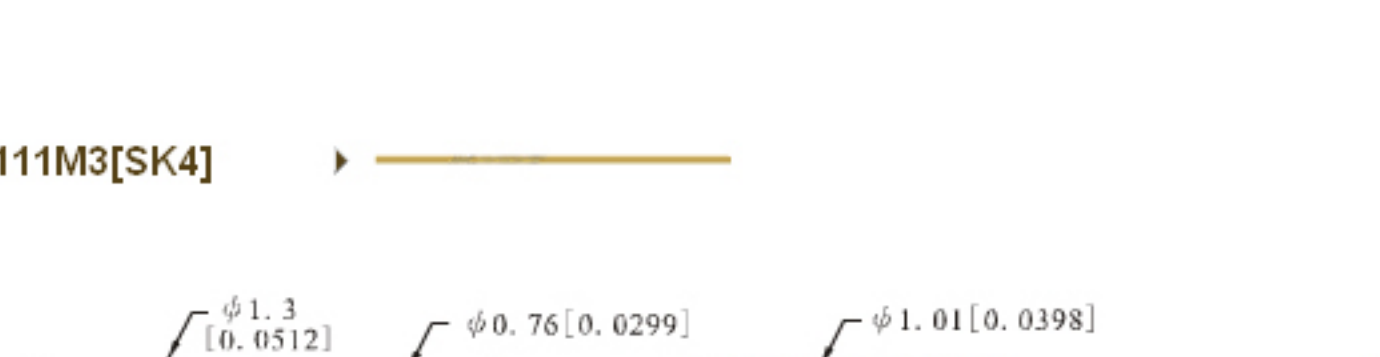


P-111T1




P-111T2[SK4]

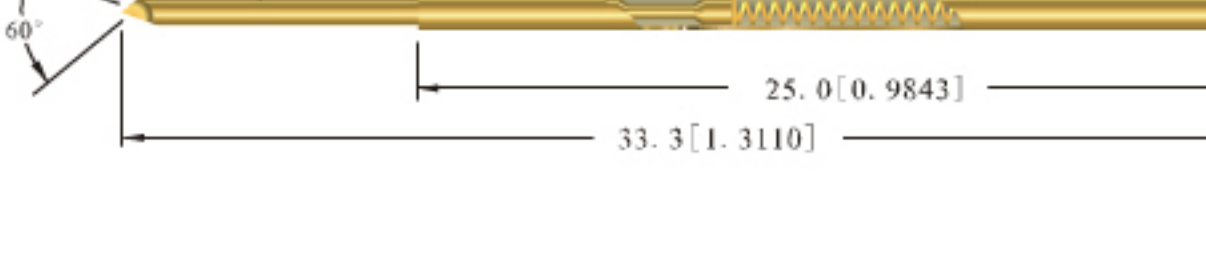

R-111VT

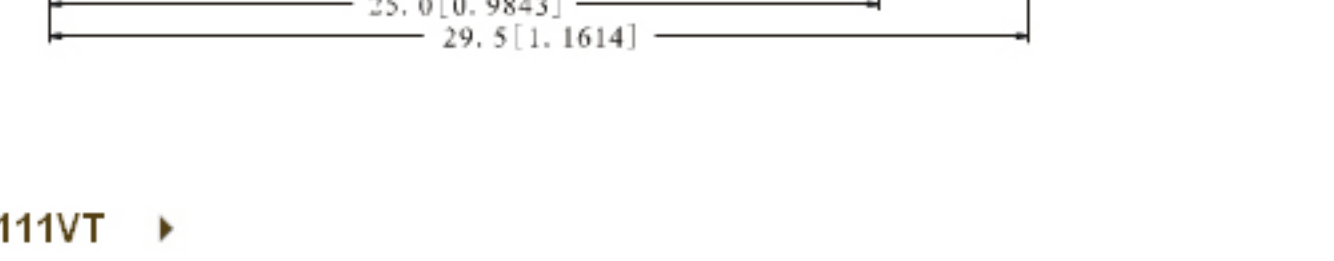


R-111V-1

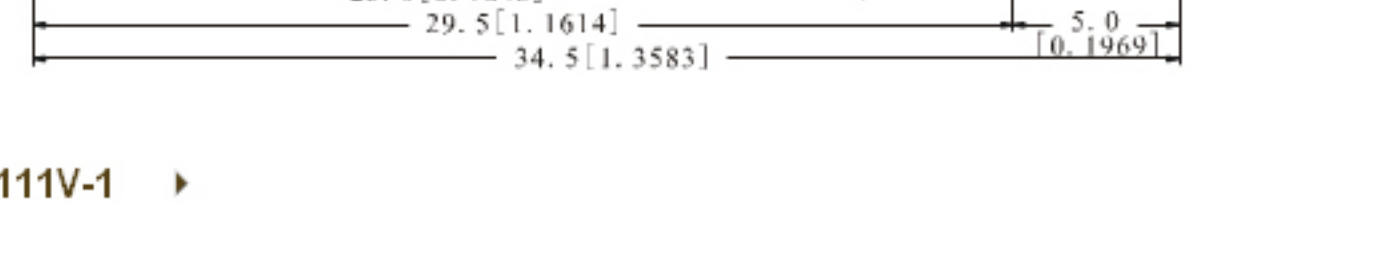


R-111WC



R-111WT

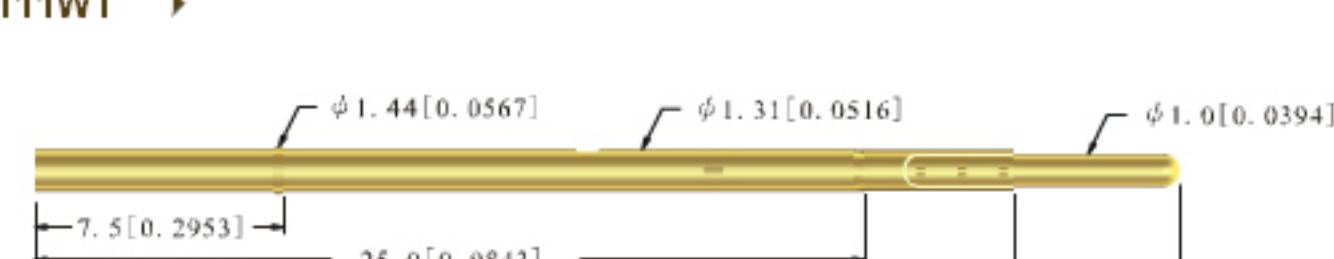

R-111W-1

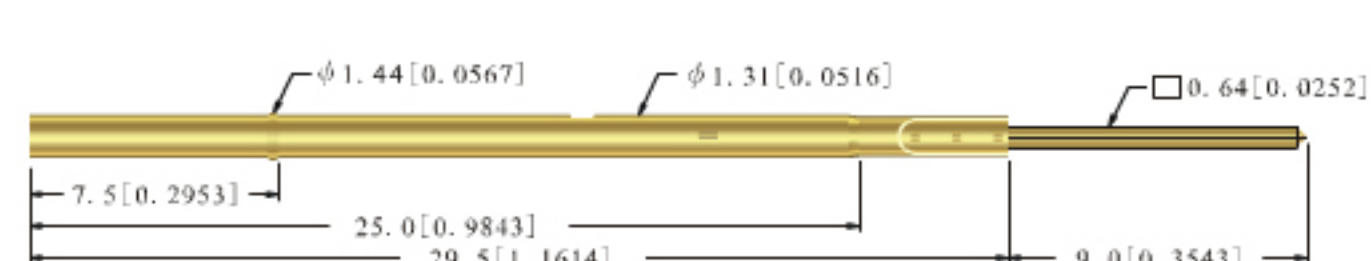

**Plunger:** Beryllium Copper or High Carbon Steel with Gold Plated

**Spring:** Stainless Steel

**Receptacle with Terminal Wire**

**Barrel:** Phosphor Bronze with Gold Plated

**Receptacle:** Phosphor Bronze with Gold Plated

<b>Min. Center:</b>	1.90 mm [0.0748 inch]	<b>Current Rating:</b>	3 A
<b>Full Stroke:</b>	6.30 mm [0.248 inch]	<b>Contact Resistance:</b>	30 mΩ
<b>Full Stroke Spring Force (±20%):</b>	250 g [8.82oz]	<b>Recommended Hole Size:</b>	1.35 mm-1.40 mm [0.0531 inch]-[0.0551 inch]
<b>2/3 Stroke Spring Force (±20%):</b>	170 g [6.00oz]		