



P-62B


Unit: mm

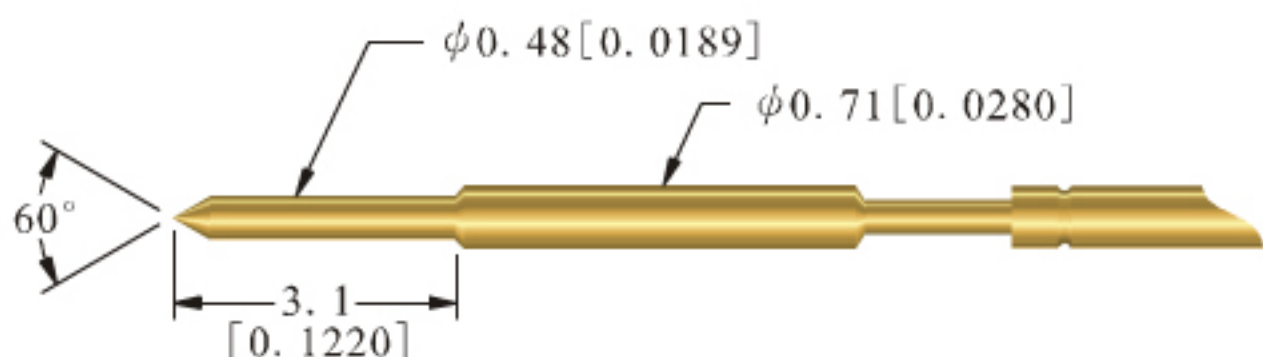


P-62F

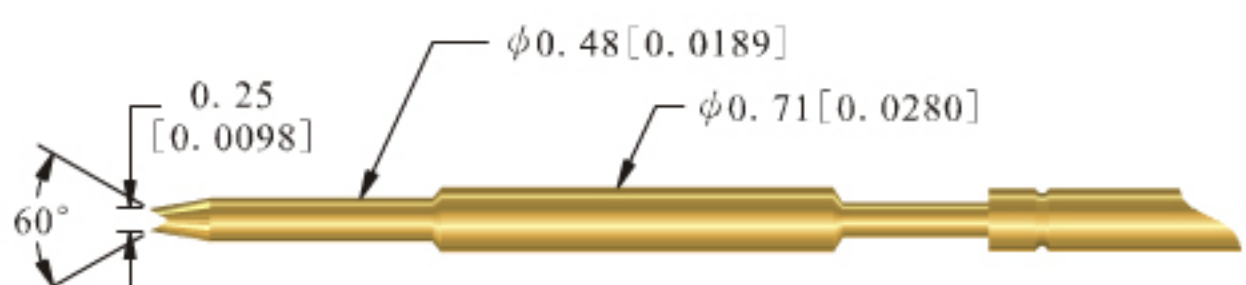


P-62H

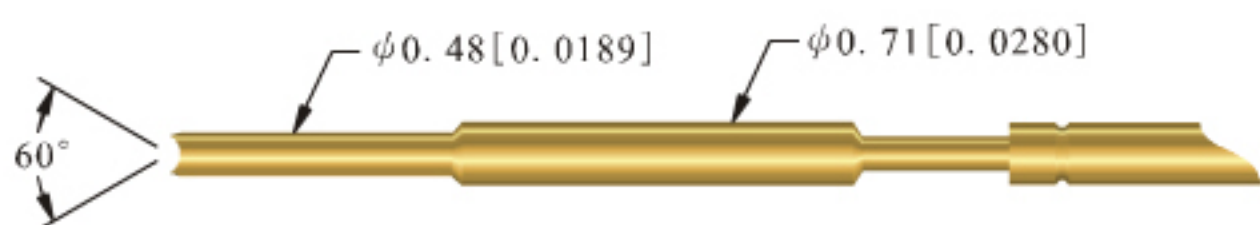

P-62T

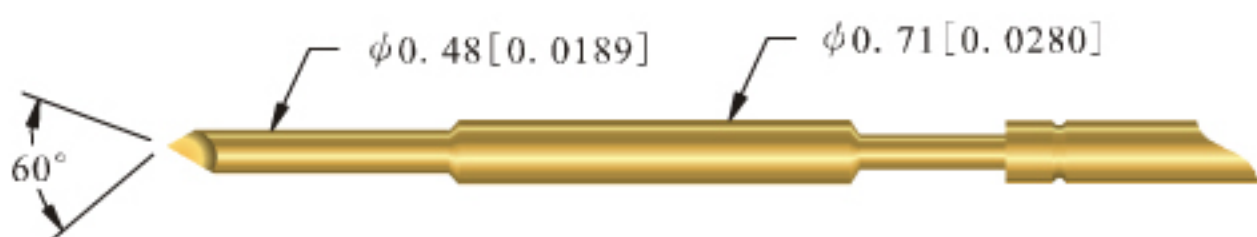

R-62W

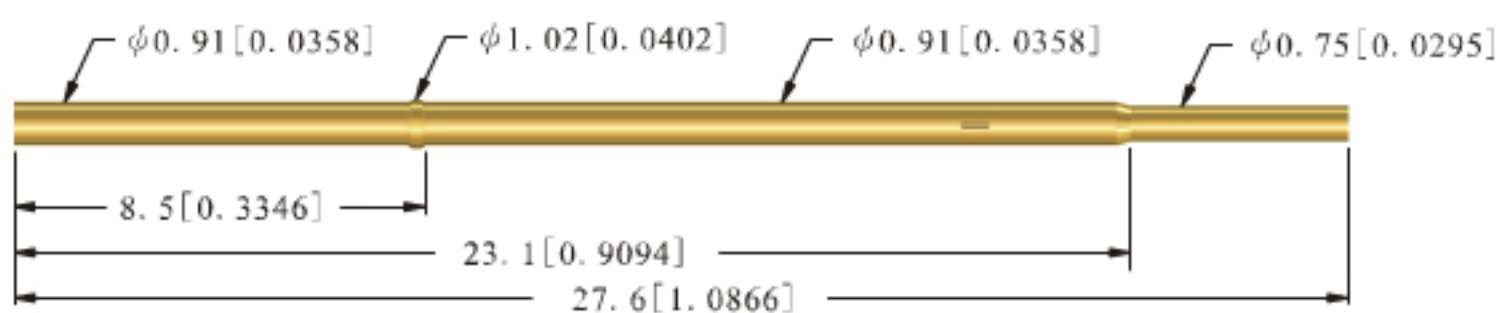

Plunger: Beryllium Copper or High Carbon Steel with Gold Plated

Spring: Stainless Steel

Receptacle with Terminal Wire

Barrel: Phosphor Bronze with Gold Plated

Receptacle: Phosphor Bronze with Gold Plated

Min.Center:	1.27 mm[0.05 inch]	Current Rating:	3 A
Full Stroke:	4.20 mm[0.1654 inch]	Contact Resistance:	30 mΩ
Full Stroke Spring Force (±20%):	150 g [5.29oz]	Recommended Hole Size:	0.95 mm[0.0374 inch]
2/3 Stroke Spring Force (±20%):	100 g [3.53oz]		