

Stopper Bolt with a Built-in Switch



2 tasks with 1 device !!

- **Housing a high-accuracy built-in switch in a spring plunger**


SP series

Housing a high-accuracy built-in switch in a spring plunger

The stroke length is relatively long and the contact force is high.
Suitable for detecting knocking out signal.

Applications

- **Knocking out check**

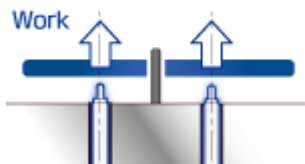

Specification

Output mode	A : Normally open / B : Normally close
Repeatability	0.01mm
Protective structure	IP40
Contact life time(Spring)	3 million


Contact rating

DC+5V~DC+24V 20mA (MAX) Resistance load



Lineup

Unit : mm

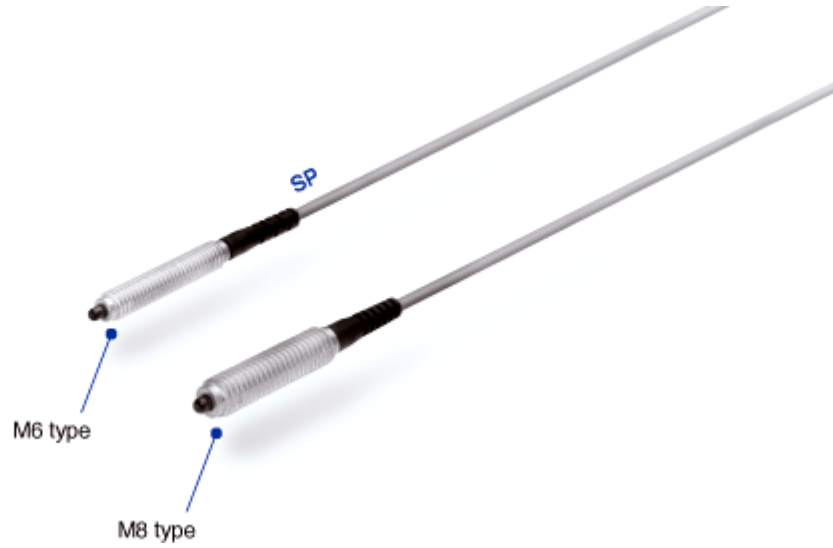

Product name	Output mode	Size	Length
--------------	-------------	------	--------

SP060A	A: NO	M6	▬▬▬
SP060B	B: NC	M6	▬▬▬
SP080A	A: NO	M8	▬▬▬
SP080B	B: NC	M8	▬▬▬

ADVANT

ADVFIT AUTOMATION SDN BHD

(Co. No. 587996-T)

Penang Office:

**No. 43, 1st Floor, Persiaran Mahsuri 1/1, Sunway Tunas,
11900 Bayan Lepas , Penang, Malaysia.**

Tel : +604-644 6113

Fax : +604-643 0113

Selangor Office (KL) :

**40A, Jalan Anggerik Vanilla AD31/AD, Sekyen 31 , Kota Kemuning ,
40460 Shah Alam , Selangor , Malaysia**

Tel : +603-5121 9727

Fax : +603-5122 9727

E-mail: Sales@advfit.com

Website: www.advfit.com

Office H/P: 016-417 6227