


Specifications:


Type	Unit	TC-11N	TC-22
		Solid state switch	Reed switch
Wiring system		Three wire type	Two wire type
Load voltage	V	DC 5~30	DC/AC 4~240
Load current	mA	0~200	5~40
Internal voltage drop.	V	0.5(Max)	2.5(Max)
Temperature range	°C	-10~70	
Delay time	mS	ON+OFF<1	
Lead wire	M	2	
Protection degree		IP67	
Output		N.O.(NPN type)	N.O.
Indicator lamp		Green	Red




Wiring diagram (TC-22)

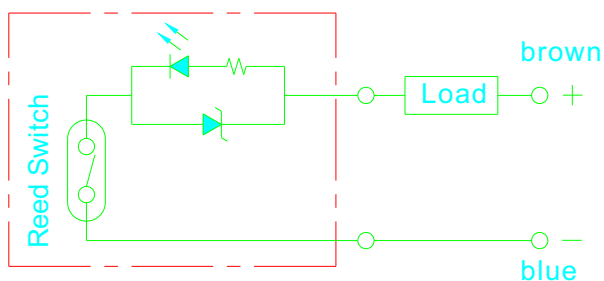

Wiring diagram (TC-11N)

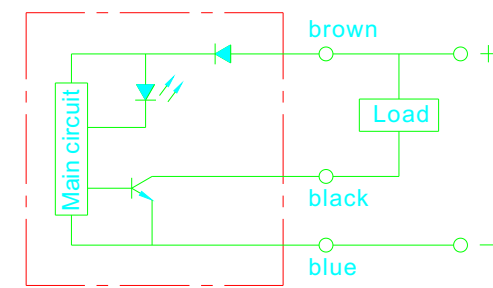


Additional external protection circuit

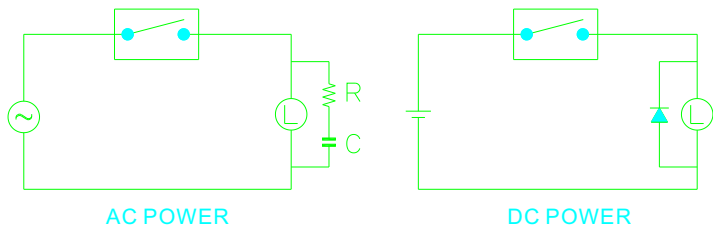

External Dimensions:

• TC-11N

Cylinder series	Bore
KA, KE	16~25
KB	10~20
KP	20~40
RC	16~40
JB	16~25
MKS,JS	63

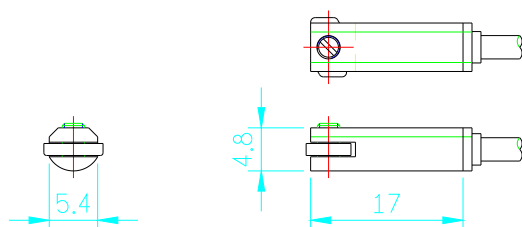

• TC-22

Cylinder series	Bore
JB	16~25
MKS, JS	63

