
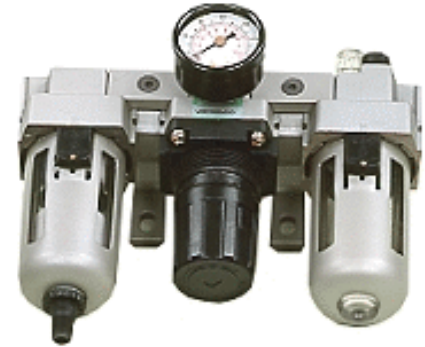


Specifications:


MODEL		UAC 2000	UAC 3000	UAC 4000
Combination	Air filter	UAF 2000	UAF 3000	UAF 4000
	Regulator	UAR 2000	UAR 3000	UAR 4000
	Lubricator	UAL 2000	UAL 3000	UAL 4000
Port size	Rc(PT)	1/8, 1/4	1/4, 3/8	3/8, 1/2, 3/4
Port size for pressure gauge	Rc(PT)	1/8		1/4
Operating fluid		Air		
Max. supply pressure	bar (Kgf/cm ²)	15		
Max. operating pressure	bar (Kgf/cm ²)	9.9		
Regulating range	bar (Kgf/cm ²)	0.5~8.5		
Max. flow rate	(Nl/min)	500	2000	4000
Temperature range		5~60°C		
Filtration		Standard: 5µm		
Recommend oil		Turbin (ISO VG32)		
Bowl material		Polycarbonate		
Construction/Regulator		Relieving type		
Weight	(Kg)	2.52	1.27	2.52
Accessory (standard)	Bowl guard	-	●	●
	Bracket	U20L	U30L	U40L

* Conditions: Supply pressure 7Kgf/cm², setting pressure: 5Kgf/cm²
 * NPT thread is available. Please contact with us.

Symbol

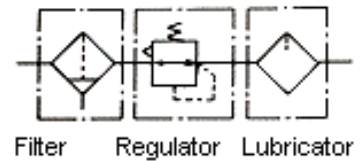


How to Order:

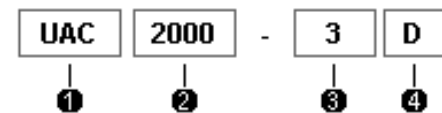

①	UAC series
②	Type series: 2000,3000,4000
③	Port size: 1:1/8", 2:1/4", 3:3/8", 4:1/2", 6:3/4"
④	D:Auto drain; Nil:Manual drain

External Dimensions:

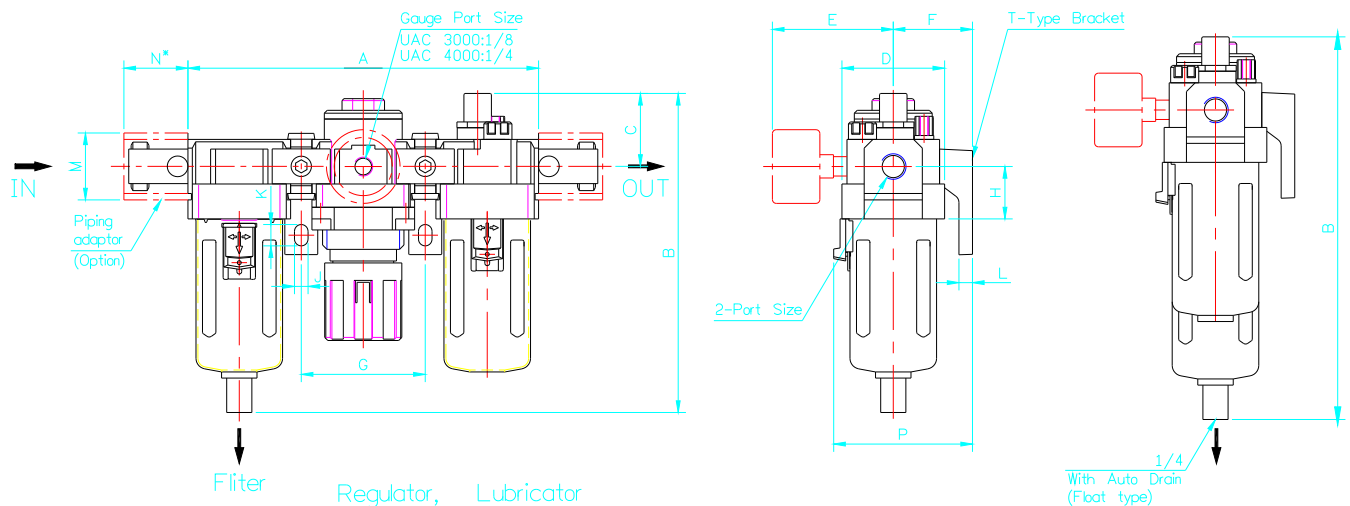

Unit: mm

MODEL	Port size	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Float type	Differential pressure type
																B	B
UAC 2000	1/8, 1/4	140	145.5	38	40	55	30	50	24	5.5	8.5	-	22	-	50	171.5	-
UAC 3000	1/4, 3/8	181	156.5	38	53	60.8	41	64	35	7	11	7	34.2	26*	70.5	182	-
UAC 4000	3/8, 1/2, 3/4	238	191.5	41	70	65.5	50	84	40	9	13	7	42.2	33*	88	217	-

* Piping adaptor 40mm for UAC 3000(1/2), 50mm for UAC 4000 (3/4).