


Specifications:

MODEL		UAL 5000
Port size	Rc(PT)	3/4, 1
Operating fluid		Air
Max. supply pressure	bar (Kgf/cm ²)	15
Max. operating pressure	bar (Kgf/cm ²)	9.9
Min operating flow	(Nl/min)	190
Bowl capacity	(cm ³)	130
Recommend oil		ISO VG32
Temperature range		5~60°C
Bowl material		Polycarbonate
Weight	(Kg)	1.1
Accessory (standard)	Bowl guard	●

* Conditions: Supply pressure; 5kg/cm², number of drip; 5 drops/min, ISO VG32.

* NPT thread is available. Please contact with us.

Symbol



Main Parts List:

No.	Part name	Material	Note
		UAL 5000	
①	Body	Aluminum die casting	Painting

Parts List:


No.	Part name	Material	Part no.
			UAL 5000
②	Sight dome ass'y	Polycarbonate	12155A
③	Filter cap ass'y	-	12164A
④	Damper guide ass'y	-	12325A
⑤	Needle valve ass'y	-	121616A
⑥	Bowl ass'y	-	C400L
⑦	O-ring	NBR	111636
⑧	Damper	Synthetic resin	123210A

How to Order:

UAL	5000	-	6
①	②		③

①	UAL series
②	Type series: 5000
③	Port size: 6: 3/4", 8: 1"

External Dimensions:

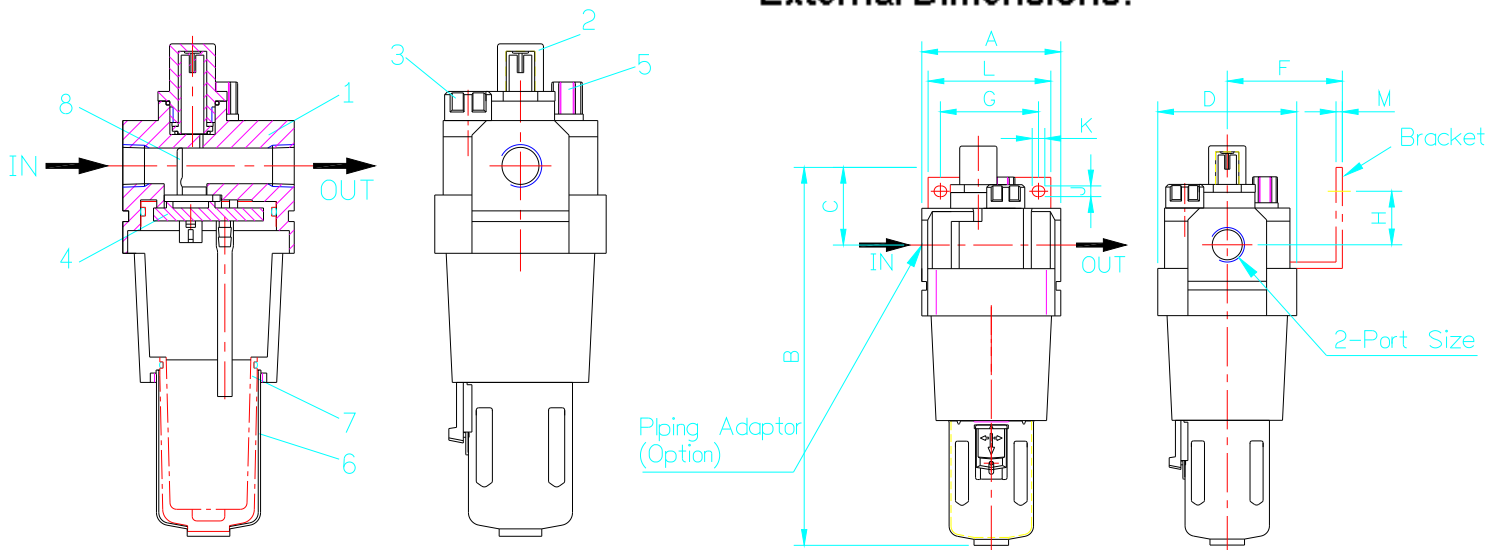

Unit: mm

MODEL	Port size	A	B	C	D	F	G	H	J	K	L	M
UAL5000	3/4, 1	90	254	45	90	70	54	25	8.5	10.5	70	2.3