


Wire Probes

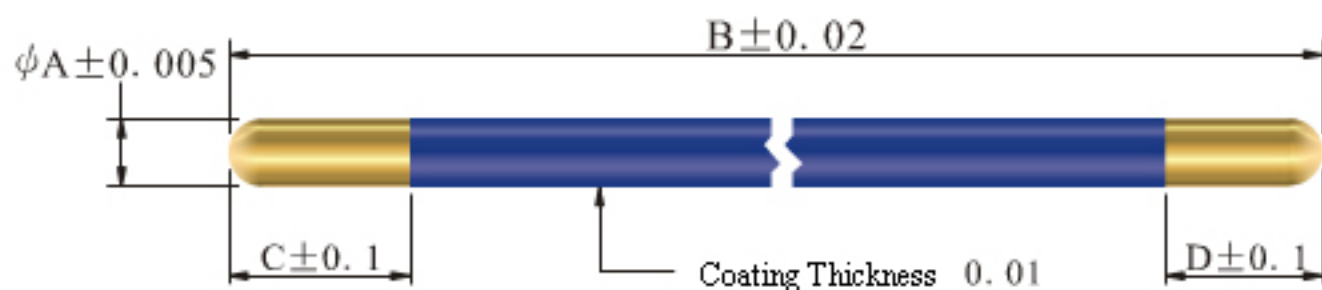

Specifications


Unit:mm

Part Number	Pitch	Coating	Dimension Unit:mm				Spring Force Unit:g Travel:0.6mm	Contact Resistance (Ω)
	Unit:mm	Color	A	B	C	D		
SSP-G□050□□-2032	0.08	Red	0.05	20	3.0	2.0	3.0	< 1.0
SSP-G□050□□-2022	0.08	Red	0.05	20	2.4	2.4	3.0	< 1.0
SSP-G□070□□-4032	0.10	Blue	0.07	40	3.0	2.0	3.5	< 1.0
SSP-G□070□□-3032	0.10	Blue	0.07	30	3.0	2.0	4.0	< 0.8
SSP-G□070□□-3022	0.10	Blue	0.07	30	2.4	2.4	4.0	< 0.8
SSP-G□090□□-3032	0.15	Green	0.09	30	3.0	2.0	9.5	< 0.7
SSP-G□090□□-3022	0.15	Green	0.09	30	2.4	2.4	9.5	< 0.7
SSP-G□110□□-3032	0.30	Purple	0.11	30	3.0	2.0	15.5	< 0.6
SSP-G□110□□-3022	0.30	Purple	0.11	30	2.4	2.4	15.5	< 0.6

Characteristics

Materials	W
Hardness	700MHv
Plating	AuCo
Coating	Acryl Melamine
Dielectric Strength	DC400V
Life	1000,000
Current Rating	0.5A

Tip style

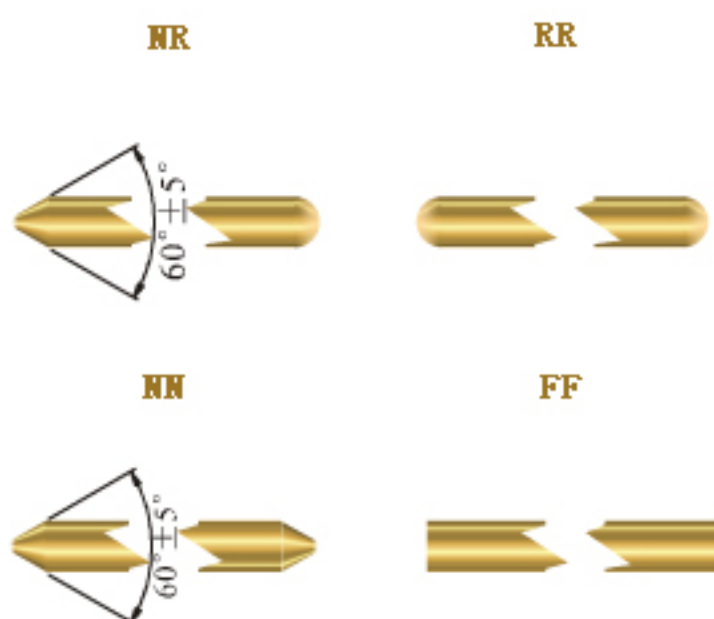

How to Order

